

**Front End 000-007  
Quad 16-Bit 250 Msps Receiver  
Reference Manual**



797 North Grove Rd, Suite 101  
Richardson, TX 75081  
Phone: (972) 671-9570  
[www.redrapids.com](http://www.redrapids.com)

Red Rapids reserves the right to alter product specifications or discontinue any product without notice. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment. This product is not designed, authorized, or warranted for use in a life-support system or other critical application.

All trademark and registered trademarks are the property of their respective owners.

Copyright © 2014, Red Rapids, Inc. All rights reserved.

---

## Table of Contents

1.0	Introduction.....	1
1.1	Contents and Structure .....	1
1.2	Conventions .....	1
1.3	Revision History .....	2
2.0	Description.....	3
2.1	Filter Build Option .....	4
2.2	Coupling.....	4
2.3	DC Offset Adjustment (DC-Coupled option only).....	5
2.4	ADC Configuration .....	6
2.4.1	ADC User Control Interface .....	8
2.4.2	ADC User Data Interface .....	8
3.0	Specifications .....	10
3.1	Input Levels.....	10
3.2	Performance .....	11
3.2.1	AC-Coupled Performance.....	11
3.2.2	DC-Coupled Performance (TBD).....	11
3.3	Absolute Maximums.....	11
4.0	Typical Performance Characteristics (Preliminary) .....	13
4.1	AC-Coupled .....	13
4.2	DC-Coupled (TBD).....	15
4.3	Generating Characterization Plots .....	15
5.0	Key Components .....	17
6.0	Technical Support.....	18

---

## List of Figures

Figure 2-1 Receiver Block Diagram .....	3
Figure 2-2 Coupling Options (equivalent circuits) .....	5
Figure 2-3 Single Channel Trim DAC Operation in DC-Coupled Build Option .....	6
Figure 2-4 ADC RX Channel Configuration .....	7
Figure 2-5 ADC User Control Interface .....	8
Figure 2-6 ADC User Data Interface .....	9
Figure 4-1 AC-Coupled Passband Profile 1 MHz to 750 MHz .....	13
Figure 4-2 AC-Coupled Passband Profile 1 MHz to 250 MHz .....	13
Figure 4-3 20.17357MHz, -1.1dBFS, .....	14
Figure 4-4 70.17347MHz, -6.0 dBFS, .....	14
Figure 4-5 124.17357MHz, -3.0dBFS .....	14
Figure 4-6 Terminated Input.....	14
Figure 4-7 Two-tones 19.1 and 20.1 MHz at -10 dBFs .....	14
Figure 4-8 Two-tones 69.1 and 70.1 MHz at -10 dBFs .....	14
Figure 4-9 Two-tones 123.1 and 124.1 MHz at -10 dBFs .....	15
Figure 4-10 Characterization Setup .....	15

## List of Tables

Table 2-1 Lowpass Filter Build Option Parameters .....	4
Table 2-1 Receiver ADC Device Configuration .....	7
Table 2-2 ADC User Interface Connections .....	7
Table 3-1 Test Environment .....	10
Table 3-2 Absolute Maximum Specifications .....	12
Table 4-1 Characterization Test Equipment.....	16
Table 5-1 Key Hardware Components .....	17

## 1.0 Introduction

### 1.1 Contents and Structure

This manual describes the Front End 000-007 receiver hardware. The focus of this manual is the electrical function of the hardware including control structure, signal flow and key components.

The manual is divided into six sections as follows:

Section	Description
Section 1	Introduction
Section 2	Description
Section 3	Specifications
Section 4	Typical Performance Characteristics
Section 5	Key Components
Section 6	Technical Support

The latest product documentation and software is available for download from the Red Rapids web site ([www.redrapids.com](http://www.redrapids.com)) by following the Technical Support link.

### 1.2 Conventions

This manual uses the following conventions:

- Hexadecimal numbers are prefixed by "0x" (e.g. 0x00058C).

	Text in this format highlights useful or important information.
---	---

	Text shown in this format is a warning. It describes a situation that could potentially damage your equipment. Please read each warning carefully.
---	--

The following are acronyms used in this manual.

- AC** Alternating Current (Greater than 0 Hertz)
- ADC** Analog to Digital Converter
- DAC** Digital to Analog Converter
- dB** Decibels
- dBFS** Decibels Relative to Full Scale
- dBm** Decibels Relative to One milliwatt
- DC** Direct Current (0 Hertz)
- FFT** Fast Fourier Transform
- LVDS** Low Voltage Differential Signaling
- MHz** Megahertz
- mV** millivolts
- MSPS** Mega Samples per Second
- PGA** Programmable Gain Amplifier
- RF** Radio Frequency
- SFDR** Spur Free Dynamic Range
- SINAD** Signal-to-Noise and Distortion Ratio

- **SNR**                      Signal-to-Noise Ratio
- **Vpp**                        Voltage, peak-to-peak

### 1.3 Revision History

Version	Date	Description
R00	12/11/2013	Initial release.
R01	08/05/2014	

## 2.0 Description


The Front End 000-007 receiver is a high performance quad-channel structure built around the Texas Instruments ADS42LB69 dual 16-bit 250 Msp/s ADC.

Features<sup>1</sup>:

- Quad Channel
- 16-bit Architecture
- SNR ( $f_{in} = 20$  MHz) 74.8 dB (2.5 Vpp), 73.5 dB (2.0 Vpp)
- SFDR ( $f_{in} = 20$  MHz) 87 dBc (2.5 Vpp), 90 dBc (2.0 Vpp)
- Sample Rate up to 250 Msp/s
- 5-Pole Chebyshev or Butterworth lowpass input filter (optional)
- 500 MHz 3dB Bandwidth
- AC or DC Coupled (Build option)
- Precision DC offset adjustment (DC-Coupled option)

**Note 1:** Features listed are mode and build dependent. See specifications and performance sections for more information.

A block diagram of the Front End 000-007 receiver is shown in Figure 2-1. The receiver consists of four independent analog input channels labeled 1 through 4. A single receiver channel consists of a front panel SMA connector, an optional signal conditioning filter, a coupling mechanism (AC or DC) and an ADC. Each analog input is digitized by an ADC to create data samples that stream to the user interface under the timing control of a high-speed precision clock distributed through a low noise network. The following paragraphs provide details about each element of the receiver section.

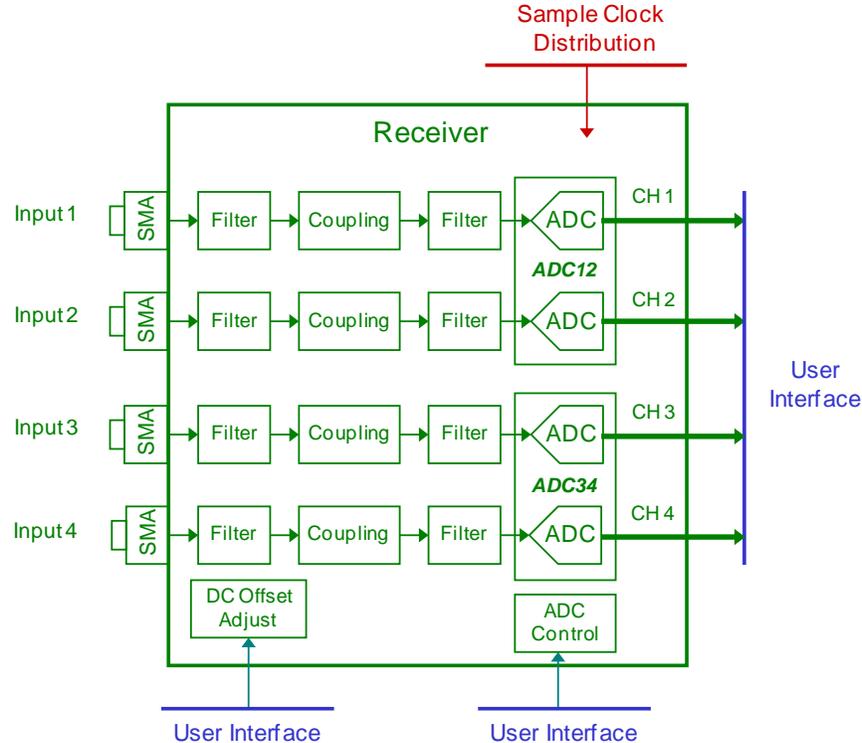

**Figure 2-1 Receiver Block Diagram**

## 2.1 Filter Build Option

The Front End Receiver has two filter build options. The standard build bypasses the filter section to provide maximum frequency response. Table 2-1 provides a summary of the populated filter build option parameters. The following paragraph provides a brief description of the filter options.

**Table 2-1 Lowpass Filter Build Option Parameters**

Parameter	Value
Filter Type	Chebyshev or Butterworth
Number of Poles	5
3 dB Bandwidth (Cutoff)	10 to 325 MHz
Passband Ripple (Chebyshev)	0.1 dB standard


The receiver is designed to accommodate a 5-pole lumped element single ended Butterworth or Chebyshev lowpass filter as a build option. The filter is located at the receiver input prior to coupling and is useful for limiting broadband noise and harmonic distortion entering the ADC. The default build bypasses the input filter section.

## 2.2 Coupling


The receiver is available AC or DC coupled as a build option as shown in Figure 2-2. AC coupled units typically offer better high frequency performance and SNR at the expense of low frequency operation. DC-coupled units provide for good low frequency operation down to DC with the expense of added noise and distortion from the coupling amplifier.

AC units block DC signal content with a 0.1 uF series capacitor and are transformer coupled to the ADC. DC-coupled units use a differential amplifier to couple the input signal to the ADC. The differential amplifier also provides signal gain allowing unit operation with a lower input signal amplitude range. DC-coupled units require a dc-coupled system source impedance of 50 Ohms to ensure proper coupling amplifier bias. Other source impedances are supported as a build option.

 DC-coupled units require a dc-coupled source impedance of 50 Ohms as part of double balanced system.

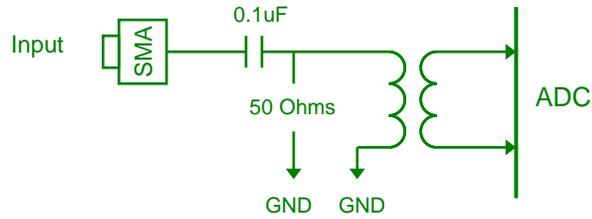

AC-Coupled Build Option

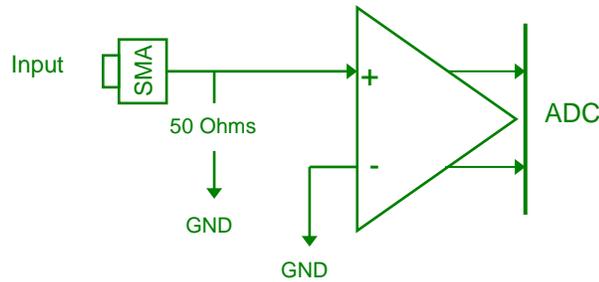


DC-Coupled Build Option

**Figure 2-2 Coupling Options (equivalent circuits)****2.3 DC Offset Adjustment (DC-Coupled option only)**


The DC-coupled receiver option contains a set of DACs to trim the larger DC offset errors that are induced by the coupling amplifier and system ground mismatch. A block diagram of the trim DAC structure is shown in Figure 2-3 for a single channel. Each receiver channel has a user programmable DC offset adjustment function implemented using a dual DAC in a push-pull configuration. The odd and even numbered channels have different adjustment DAC configurations due to board layout considerations. In RX channels 1 and 3 DAC A offsets the ADC input voltage in a positive direction while DAC B offsets the ADC input in a negative direction. Conversely in RX channels 2 and 4 DAC B offsets the ADC input voltage in a positive direction while DAC A offsets the ADC input in a negative direction. Trim DAC register settings can be found in the device data sheet listed in section 5.0. Trim DAC configuration is user programmable via the user Interface.



Only one of the pair of offset trim DACs per input should be active at a time. The unused trim DAC should be set to 0 V.

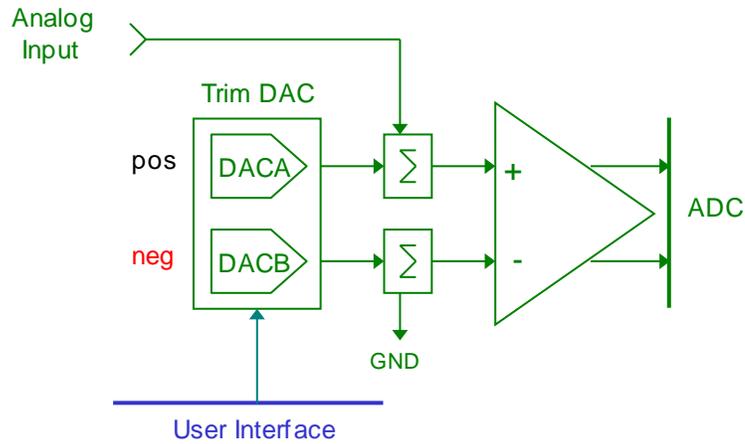

RX CH1 and RX CH 3 (Odd channel configuration)

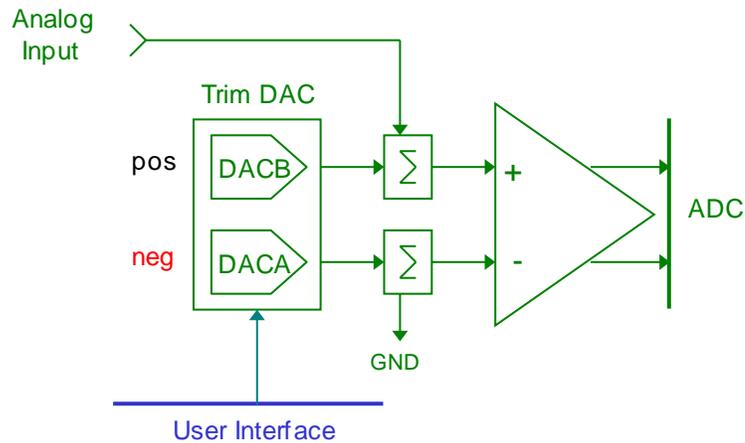


RX CH 2 and RX CH 4 (Even channel configuration)

**Figure 2-3 Single Channel Trim DAC Operation in DC-Coupled Build Option****2.4 ADC Configuration**

The receiver ADC has a number of configuration options available to support different modes of operation. These operational modes are described in the ADC device data sheet listed in section 5.0. Some features are user configurable via the ADC SPI port. Some features are hardwired in the board design. The following paragraphs describe how the ADC device is connected for use in Front End 000-007.

Front End 000-007 has four receiver channels routed to two dual ADCs labeled as ADC12 and ADC34 with RX channels 1 and 2 routed to ADC12 and RX channels 3 and 4 routed to ADC34. A generic block diagram of the RX channel configuration is shown in Figure 2-4. Each ADC is programmed independently using the SPI port through the user interface.

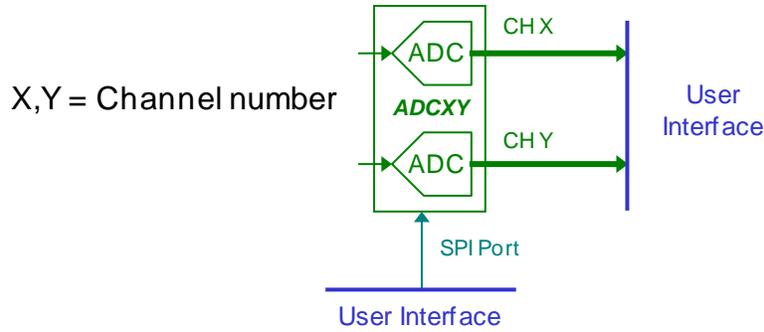

**Figure 2-4 ADC RX Channel Configuration**

A summary of the ADC device hardware configuration is provided in Table 2-2. This table describes ADC device control pin physical connections. Pin names are taken from the device data sheet listed in section 5.0.

**Table 2-2 Receiver ADC Device Configuration**

Device Pin Name	Connection	Description
INAP/M	RX CH1 input RX CH3 input	Analog input 1 (ADC12) Analog Input 3 (ADC34)
INBP/M	RX CH2 input RX Ch4 input	Analog input 2 (ADC12) Analog Input 4 (ADC34)
VCM	Analog Input Bias	Used to bias analog inputs for ADC
CLKINP/M	Sample Clock	Connected to sample clock distribution network
SYNCINP	Pull down	10.0k Ohm to ground. (not used)
SYNCINM	Pull up	10.0k Ohm to Va (supply)
RESET	PCI Reset	Connected to PCI system reset

Table 2-3 provides a list of ADC user interface connections. These are connections between the ADC and the user interface that provide access to ADC control options and data.

**Table 2-3 ADC User Interface Connections**

Device Pin Name	User Interface Name	Description
SEN	spi_csb(n)	SPI port chip select (one each for ADC12 and ADC34)
SDATA	spi_sdi	SPI port data in
SCLK	spi_clk	SPI port clock
SDOUT	spi_sdo	SPI port data out
CLOCKOUTP/M	RX1_CLKP/N RX3_CLKP/N	RX1_CLK is from ADC12 RX3_CLK is from ADC34
DA(14:0)P/M	RX1_DATAP/N(7:0), RX3_DATAP/N(7:0)	RX1_DATA from ADC12 RX3_DATA from ADC34
DB(14:0)P/M	RX2_DATAP/N(7:0), RX4_DATAP/N(7:0)	RX2_DATA from ADC12 RX4_DATA from ADC34
CTRL1	CH1, 3 OVR	Over range flag for CH1 (ADC12) CH3 (ADC34)
CTRL2	CH2, 4 OVR	Over range flag for CH2 (ADC12) CH4 (ADC34)

### 2.4.1 ADC User Control Interface

A diagram of ADC user control interface is shown in Figure 2-5. The user has access to the ADC command and status registers through a SPI port. In addition there are discrete control and status lines that are available to the user through the User Interface.



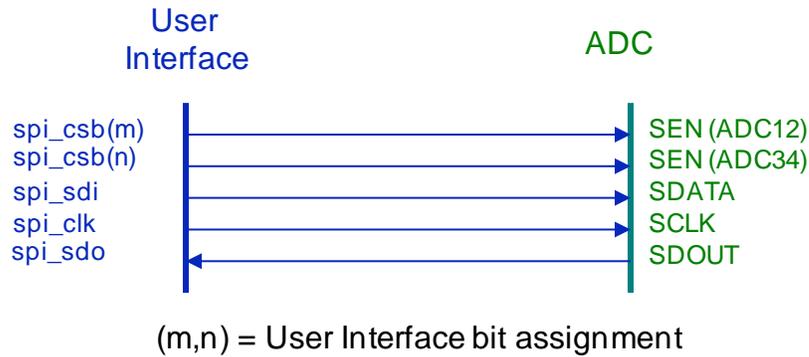


Figure 2-5 ADC User Control Interface

### 2.4.2 ADC User Data Interface

A diagram of the ADC user data interface is shown in Figure 2-6. Each ADC digital data output encodes 2 bits per clock period with even bits output on the rising edge of clock and odd bits on the falling edge. In this manner 16 bits of data are transferred over 8 LVDS pairs. The ADC outputs a forwarded data clock. Please see the ADC datasheet referenced in section 5.0 for more information on data transfer.

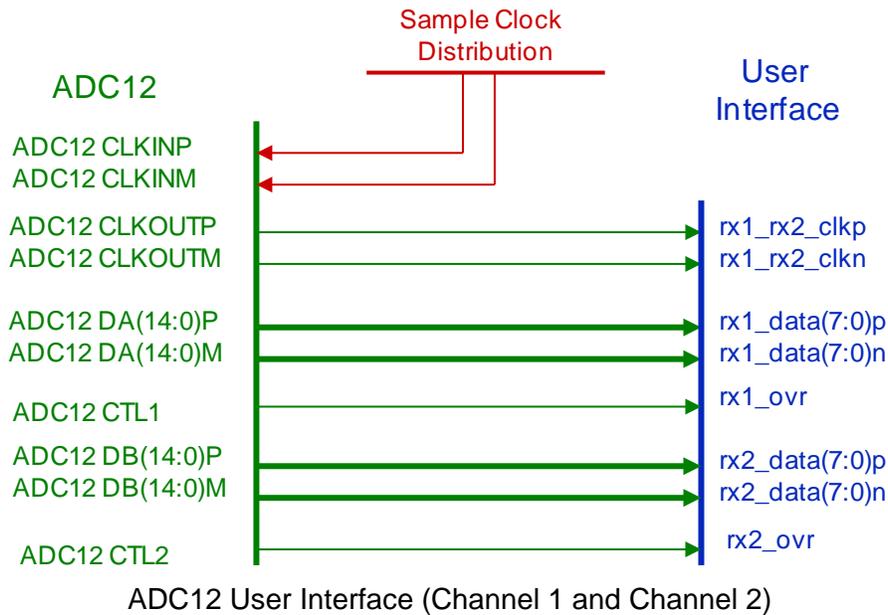

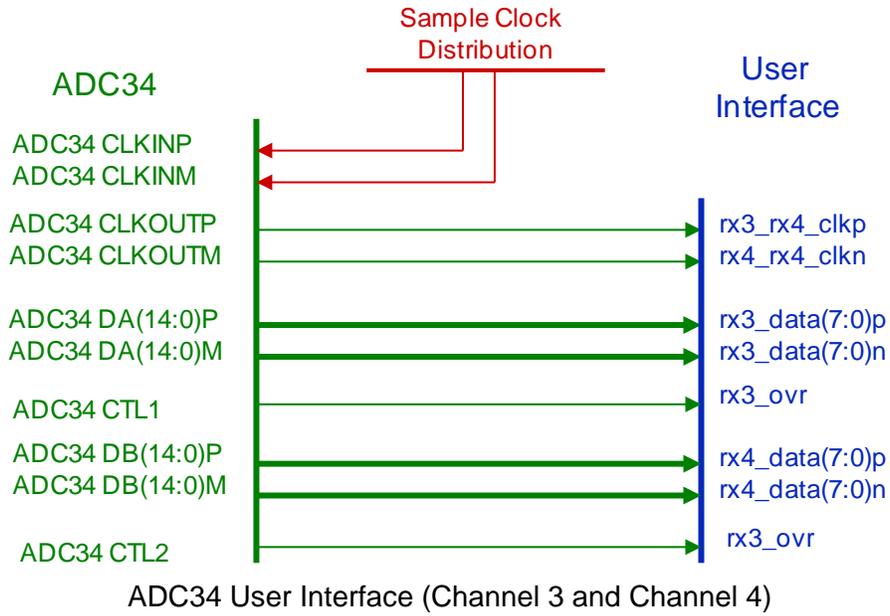

**Figure 2-6 ADC User Data Interface**

### 3.0 Specifications

The following section lists the performance specifications of the Front End Receiver based on direct unit measurement unless otherwise noted. Measurements are listed as typical and represent the mean performance of a representative sample of units under laboratory conditions as listed in Table 3-1. More information on test setup can be found in section 4.3. Some variation in performance will occur based on build variation, external system performance and environment. See key component device data sheets in section 5.0 for more insight on performance variation.

**Table 3-1 Test Environment**

Item	Description
Host	Personal Computer, On carrier in PCIe x4 Slot
Air Temperature	25 C (Room)
Cooling	Convection (Fan)
Voltage	Nominal "Typical" levels
Clock	250 MHz External Clock

### 3.1 Input Levels

Parameter	Min	Typ	Max	Unit
Input Impedance		50		Ohms
ADC Offset Error <sup>(1)</sup>	-20		+20	mV
Un-calibrated DC Coupling Offset Error <sup>(2)</sup>	-50		+50	mV
ADC Gain Error	-5%		+2%	FS
Full Scale Input (0 dBFS, 50 ohms) <sup>(3)</sup>				
AC-Coupled Mode				
2.0 Vpp mode				
Input Voltage		2.2		Vpp
Input Power		+10.8		dBm
2.5 Vpp mode				
Input Voltage		+2.8		Vpp
Input Power		+12.8		dBm
DC-Coupled Mode (TBD Gain)				
Common Mode Voltage Range		0		V
2.0 Vpp mode				
Input Voltage		1.0		Vpp
Input Power		+4.0		dBm
2.5 Vpp mode				
Input Voltage		1.25		Vpp
Input Power		+5.9		dBm

- Notes: <sup>(1)</sup> ADC offset dominates when AC coupled  
<sup>(2)</sup> Typical DC offset due to component tolerance, does not include system DC variation.  
<sup>(3)</sup> Average full scale power input across first Nyquist zone (125 MHz).

### 3.2 Performance

 Performance may vary depending on the quality of the power supply and EMI environment of the host.

#### 3.2.1 AC-Coupled Performance

Parameter	Min	Typ	Max	Unit
Passband <sup>(1)</sup>				
1 dB	1		250	MHz
3 dB	0.1		500	MHz
SNR <sup>(2)</sup>				
2.0 Vpp mode				
20.17 MHz Input		73.5		dB
70.17 MHz Input		72.5		dB
124.17 MHz Input		71.4		dB
2.5 Vpp mode				
20.17 MHz Input		74.8		dB
70.17 MHz Input		73.4		dB
124.17 MHz Input		72.3		dB
SINAD <sup>(2)</sup>				
2.0 Vpp mode				
20.17 MHz Input		73.4		dB
70.17 MHz Input		72.4		dB
124.17 MHz Input		71.3		dB
2.5 Vpp mode				
20.17 MHz Input		74.7		dB
70.17 MHz Input		73.3		dB
124.17 MHz Input		72.2		dB
SFDR				
2.0 Vpp mode				
20.17 MHz Input <sup>(3)</sup>		90		dBc
70.17 MHz Input <sup>(4)</sup>		86		dBc
124.17 MHz Input <sup>(5)</sup>		80		dBc
2.5 Vpp mode				
20.17 MHz Input <sup>(3)</sup>		87		dBc
70.17 MHz Input <sup>(4)</sup>		86		dBc
124.17 MHz Input <sup>(5)</sup>		80		dBc
Channel to Channel Isolation				
50 MHz		90		dB
250 MHz		73		dB
500 MHz		72		dB

Notes:

<sup>(1)</sup> Measured across band using ADC output.

<sup>(2)</sup> Performance extrapolated from -11 dBFS measurements due to test equipment limitations (filter bleed through).

<sup>(3)</sup> Derived from -1.1 dBFS measurements due to test equipment limitations.

<sup>(4)</sup> Derived from -6.0 dBFS measurements due to test equipment limitations.

<sup>(5)</sup> Derived from -3.0 dBFS measurements due to test equipment limitations.

#### 3.2.2 DC-Coupled Performance (TBD)

### 3.3 Absolute Maximums

Stresses above those listed in Table 3-2 may cause damage to the unit. The operation of the unit at these or any other conditions outside of those indicated in the operating

sections of this specification is not implied. Exposure to absolute maximum conditions for extended periods may degrade unit reliability.

**Table 3-2 Absolute Maximum Specifications**

Parameter	Min	Typ	Max	Unit
Receiver Inputs (50 Ohms)				
AC-Coupled				
DC Input Voltage	-10		10	V
AC Voltage Swing			4.4	Vpp
AC Input Power			+17	dBm
DC-Coupled				
DC Input Offset plus AC swing		TBD		V
AC Voltage Swing (Centered at 0V)		TBD		Vpp
AC Input Power (Centered at 0V)		TBD		dBm

!	Exposure to absolute maximum conditions for extended periods may degrade unit reliability.
---	--

## 4.0 Typical Performance Characteristics (Preliminary)

The following sections contain spectrum plots of the receiver showing typical performance for a variety of sine wave inputs. The receiver performance section is divided into AC and DC coupled subsections. Each sine input is characterized using a 32k point FFT.

### 4.1 AC-Coupled

The following receiver plots were taken with the receiver configured for the AC-coupled build option with the input filter bypassed.

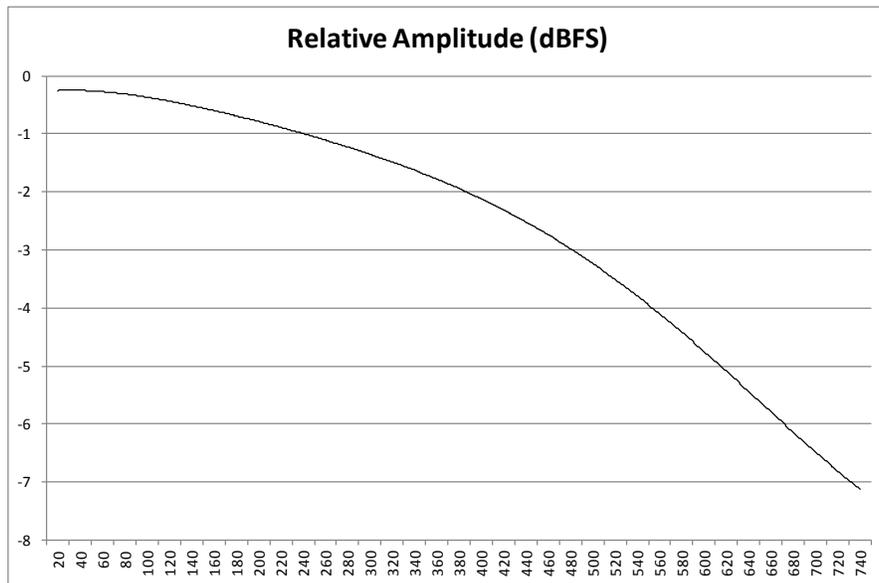


Figure 4-1 AC-Coupled Passband Profile 1 MHz to 750 MHz



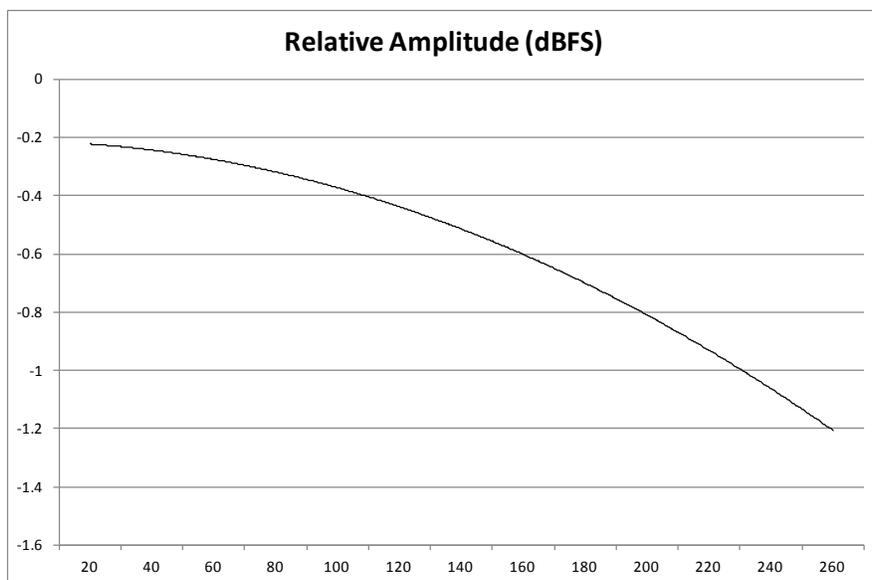



Figure 4-2 AC-Coupled Passband Profile 1 MHz to 250 MHz

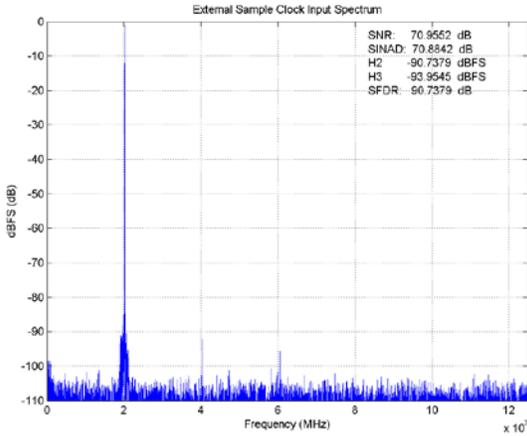


**Figure 4-3 20.17357MHz, -1.1dBFS,**

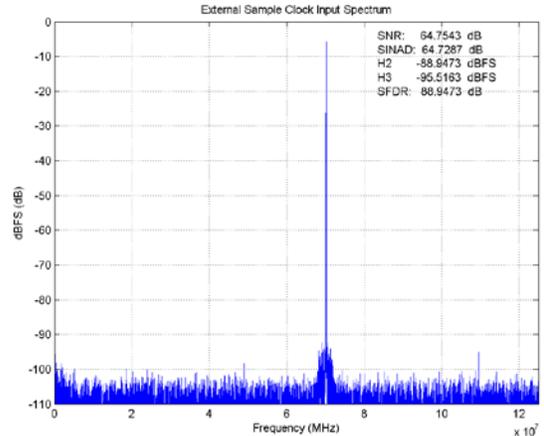


**Figure 4-4 70.17347MHz, -6.0 dBFS,**

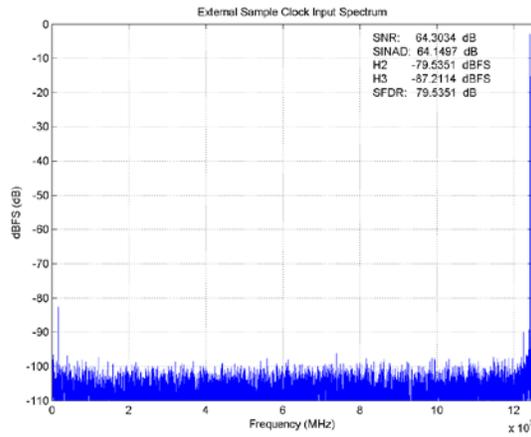


**Figure 4-5 124.17357MHz, -3.0dBFS**

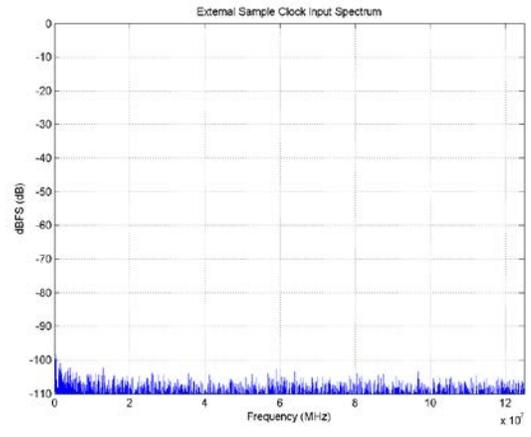


**Figure 4-6 Terminated Input**

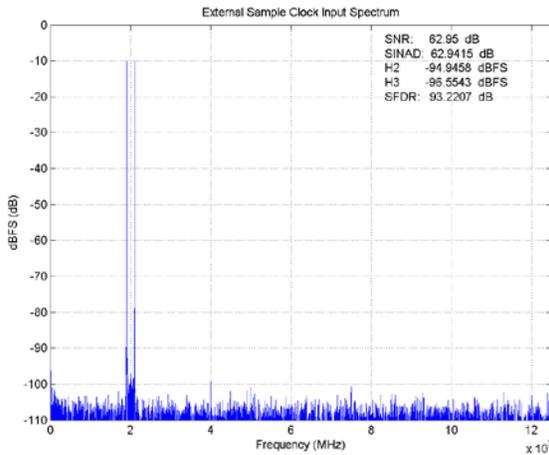

**Figure 4-7 Two-tones 19 and 21 MHz at -10 dBFS**

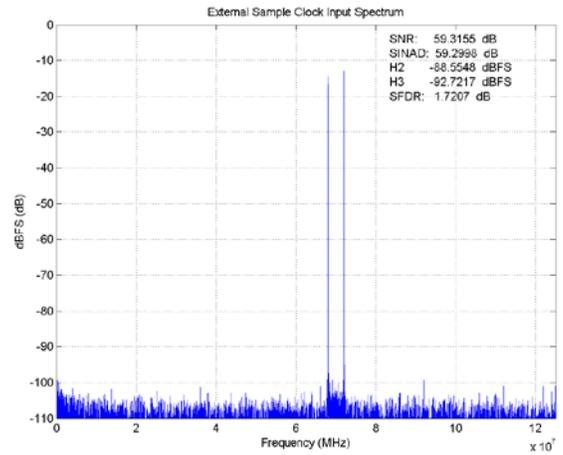

**Figure 4-8 Two-tones 68 and 72 MHz at -13 dBFS**

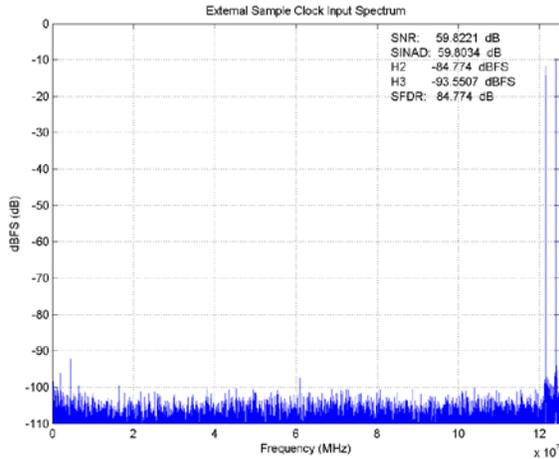


**Figure 4-9 Two-tones 121.5 and 124 MHz at -10 dBFs**

## 4.2 DC-Coupled (TBD)

### 4.3 Generating Characterization Plots

The wide dynamic range and input bandwidth characteristics of the receiver levy strict signal conditioning requirements on test equipment used to characterize board performance. Even the highest quality general purpose RF signal generators output harmonics and noise that must be reduced in order to accurately characterize system performance. Generally a narrow bandpass filter is inserted between the signal generator output and the Adapter Module receiver input. The bandpass filter should be reasonably narrow to eliminate generator harmonics and limit the amount of generator phase noise input into the receiver. Red Rapids' characterization plots were created using 5% bandwidth 7-section Chebyshev filters with > 55 dB of stop band rejection. We used filters from TTE such as their KC7t-70m-3.5m-50-720a. Table 4-1 contains a list of test equipment used to generate the characterization plots of section 4.0. The characterization frequency plots were generated by performing a 32k FFT on 32k data samples collected from the receiver.

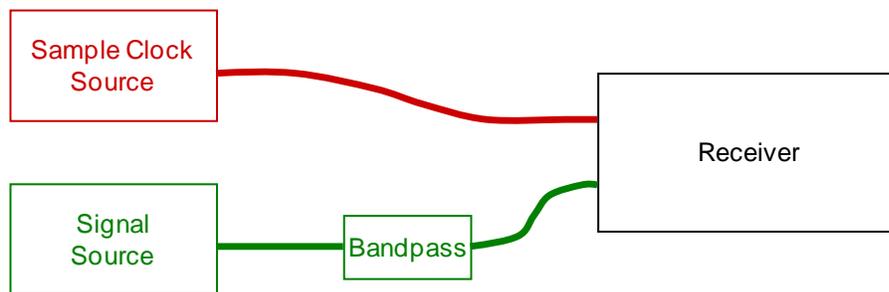

**Figure 4-10 Characterization Setup**

 Use a narrow bandpass filter between the signal generator and receiver card to accurately characterize system.

**Table 4-1 Characterization Test Equipment**

<b>Function</b>	<b>Part Number</b>	<b>Manufacturer</b>
Sample Clock Source	HP8648B	Agilent
Signal Bandpass Filter (one of several)	KC7t-70m-3.5m-50-720a	TTE
Signal Source	HP8648B	Agilent

## 5.0 Key Components

Key hardware components for the Receiver are listed in Table 5-1. Device datasheets can be downloaded from vendor websites for more information.

**Table 5-1 Key Hardware Components**

<b>Component</b>	<b>Part Number</b>	<b>Vendor</b>	<b>Comments</b>
Receiver ADC	ADS42LB69	Texas Instruments	Dual Channel 16-bit, 250 Msps ADC
Trim DAC	LTC1661CMS8#PBF	Linear Technology	Dual 10-bit Micropower DAC

## 6.0 Technical Support

Please feel free to contact us if you have a technical question about or problem with our product. We understand that our customers have tight deadlines and time is of the essence in development and production cycles. We will make every effort to resolve problems as quickly as possible.

Web: [www.redrapids.com](http://www.redrapids.com)

Email: [support@redrapids.com](mailto:support@redrapids.com)

Phone: 972-671-9570

Fax: 972-671-9572

Please include the following information with your correspondence:

Contact Information

Product Model

Host Card or System (PC, PCI Carrier, Single Board Computer)

Operating System

Problem Description